

# ATL18B

## Single 18" Subwoofer



### FEATURES

- Powerful 900 W subwoofer, featuring a single 18" driver with a 100 mm (4") dual layer voice coil, providing more surface area for strength and durability.
- Precision-made 15-ply 24 mm and 11-ply 18 mm Baltic birch plywood cabinet, with a durable paint finish for touring and rental use.
- Optimized cabinet structure designed to reduce unwanted resonances and airflow noise.
- Low frequency extends down to 30 Hz (@ -10dB).
- The LF drivers features a humidity resistant paper cone.
- The integrated rigging system has a 7:1 safety coefficient.
- Designed for touring, outdoor concerts, stadiums, fixed installation and for all demanding sound reinforcement applications.
- Designed to be flown in ATEC AT110-V2 Line Array Systems.
- Recommended for ground stacking with all ATEC, AR Curve Array Systems, FP, TH900 and all full-range speaker systems.




### SPECIFICATIONS

Frequency Response	40 Hz - 150 Hz ( $\pm 3$ dB) / 30 Hz - 250 Hz (-10 dB)
Sensitivity (1 W / 1 m)	98 dB
SPL (1 m)	127 dB (Continuous) / 133 dB (Peak)
Power Rating (AES)	900 W
Nominal Impedance	8 ohm
LF Driver	1 $\times$ 18" Ferrite woofer / 100 mm Voice Coil
Enclosure	Phase Inverted
Fittings	AT110 - V2 FK
Connectors	NEUTRIK NL4MP $\times$ 2 HF: 2+2- LF: 1+1-
Dimensions (W $\times$ D $\times$ H)	641 $\times$ 835 $\times$ 551 mm
Net Weight	61 kg

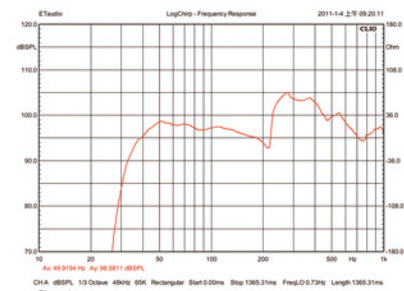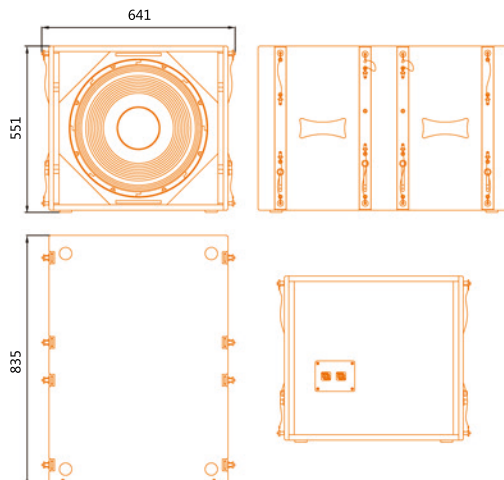

Frequency Response Curve

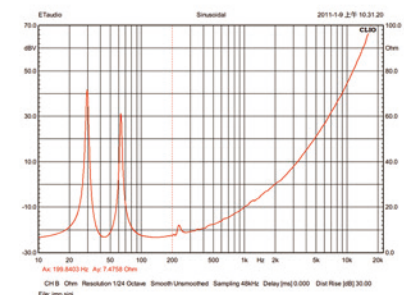

Impedance Curve