

U06E


Single 6.5" Full Range Speaker

FEATURES


- 2-Way compact cabinet.
- Single 6.5" driver.
- 90° × 60° dispersion.
- 85 Hz - 20 kHz frequency response (@ - 10 dB).
- High definition sound.
- Pole-mount socket.

SPECIFICATIONS

Frequency Response	100 Hz - 20 kHz (±3 dB) / 85 Hz - 20 kHz (-10 dB)
Dispersion (H × V)	90° × 60°
Sensitivity (1 W / 1 m)	93 dB
SPL (1 m)	116 dB (Continuous) / 122 dB (Peak)
Power Rating (AES)	200 W
Nominal Impedance	8 ohm
HF Driver	1 × 1" / 44 mm Voice Coil
LF Driver	1 × 6.5" Paper Cone Woofer / 50 mm Voice Coil
Fittings	M10 Flying Points × 5
Connectors	NEUTRIK NL4MP × 2 Full: 1+1-
Dimensions (W × D × H)	208 × 200 × 354 mm
Net Weight	13 kg

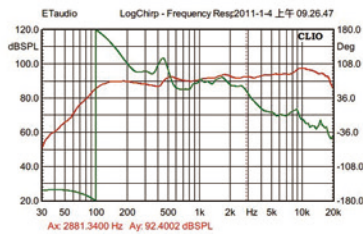

Frequency Response Curve

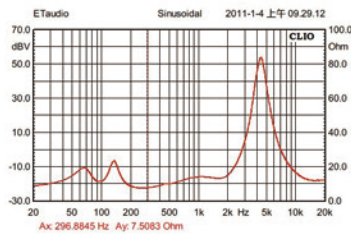

Impedance Curve

